


# 동원 프리미엄 4극 황형 모터



## 외형치수도

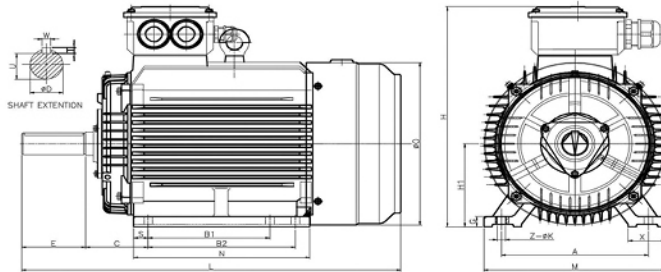

kW	HP	Frame No.	DIMENSIONS(mm)																	BEARING NO.		kg		
			L	H	H1	ΦO	B1	B2	N	S	C	E	A	M	X	G	Z-ΦK	ΦD	T	U	W		DRIVE	OPP. DRIVE
0.75	1	80M	294	206	80	154	100		122	11	50	40	125	159	27	10	4-10	19	6	15.5	6	6204ZZ	6204ZZ	13
1.5	2	90L	373	222	90	172	125		155	15	56	50	140	177	35	12	4-10	24	7	20	8	6205ZZ	6205ZZ	18.5
2.2	3	100L	401	247	100	193	140		176	17	63	60	160	208	42	12	4-12	28	7	24	8	6206ZZ	6206ZZ	27
3.7	5	112M	429	281	112	213	140		180	20	70	60	190	222	45	12	4-18	28	7	24	8	6206ZZ	6206ZZ	38
5.5	7.5	132S	492	320	132	252	140		180	20	89	80	216	256	50	15	4-18	38	8	33	10	6208ZZ	6208ZZ	50
7.5	10	132M	530	320	132	252	178		218	20	89	80	216	256	50	15	4-18	38	8	33	10	6208ZZ	6208ZZ	58
11	15	160M	610	424	160	314	210		260	25	108	110	254	314	65	20	4-14.5	42		37	12	6209ZZ	6209ZZ	122
15	20	160L	654	424	160	314	210	254	304	25	108	110	254	314	65	20	6-14.5	42		37	12	6309ZZ	6209ZZ	144
18.5	25	180M	686	463	180	354	241		311	35	121	110	279	349	70	22	4-14.5	48		42.5	14	6311ZZ	6211ZZ	185
22	30	180M	686	463	180	354	241		311	35	121	110	279	349	70	22	4-14.5	48		42.5	14	6312ZZ	6211ZZ	204
30	40	180L	724	463	180	354	279		349	35	121	110	279	349	70	22	4-14.5	55		49	16	6312ZZ	6211ZZ	214
37	50	200L	799	512	200	396	305		369	32	133	140	318	388	70	25	4-18.5	60		53	18	6313ZZ	6212ZZ	297
45	60	200L	799	512	200	396	305		369	32	133	140	318	388	70	25	4-18.5	60		53	18	6313ZZ	6212ZZ	299
55	75	225S	848	558	225	445	286	311	393	46	149	140	356	431	75	28	6-18.5	65		58	18	6314ZZ	6312ZZ	382
75	100	250S	909	617	250	484	311	349	445	55	168	140	406	484	80	30	6-24	75		68	20	6317ZZ	6313ZZ	500
90	120	250M	909	617	250	484	349		445	55	168	140	406	484	80	30	4-24	75		68	20	6317ZZ	6313ZZ	512
110	150	280S	1009	676	280	546	368		485	44	190	170	457	542	85	35	4-24	85		76	22	6318ZZ	6314ZZ	719
132	180	280M	1060	676	280	546	419		536	69	190	170	457	542	85	35	4-24	85		76	22	6318ZZ	6314ZZ	725
160	215	315S	1223	855	315	620	406		570	29	216	170	508	628	120	45	4-28	95		86	25	6320C3	6319C3	1088
185	250	315M	1333	855	315	620	457		680	84	216	170	508	628	120	45	4-28	95		86	25	6320C3	6319C3	1220
200	270	315M	1333	855	315	620	457		680	84	216	170	508	628	120	45	4-28	95		86	25	6320C3	6319C3	1228

## 결선도

회전방향	Δ결선(저전압)	Y결선(고전압)	Y-Δ결선(저전압)
정방향(CW)			
역방향(CCW)			